
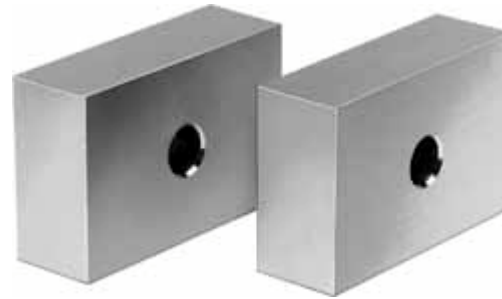


1-2-3 Block

- Precision ground on all 6 sides.
- Hardened to HRC55 to HRC60.
- Ideal for mounting work for precision grinding and lay out.
- Surface finish to 6 – 16 microinches
- The cross drilling design gives minimum weight and maximum strength.
- Each set contains 2 matched blocks.
- Different tolerances and holes for different applying conditions.
- General packing: Cardboard box. (Blow mold case is optional)

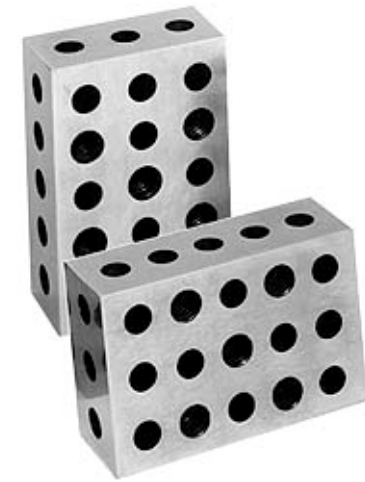

Description		Dimension Tol	Squareness	Holes	
1-2-3 Block		0 ~ 0.0003"	0.0003"/1"	18 untapped holes; 5 tapped holes are 3/8-16; 23 holes on 3 sides, 46 holes on all 6 sides.	
1-2-3 Block		0 ~ 0.0003"	0.0003"/1"	Without hole.	
1-2-3 Block		0 ~ 0.0003"	0.0001"/1"	18 untapped holes; 5 tapped holes are 3/8-16; 23 holes on 3 sides, 46 holes on all 6 sides.	
1-2-3 Block		0 ~ 0.0003"	0.0001"/1"	5 tapped holes are 5/16"-18; 6 holes drilled through with deep recess for easy clamping; 11 holes on 3 sides; 22pcs holes on 6 sides.	
1-2-3 Block		0 ~ 0.0003"	0.0001"/1"	One 1/2" hole.	
1-2-3 Block		0 ~ 0.0003"	0.0001"/1"	Without hole.	
1-2-3 Block		0 ~ 0.0003"	0.0001"/1"	Consists of one pair of 1-2-3 block, five plated 5/16- 18 socket head cap screws and a hex key wrench.	

2-3-4 & 2-4-6 Block

- Precision ground on all 6 sides.
- Hardened to HRC55 to HRC60.
- Ideal for mounting work for precision grounding and lay out.
- Surface finish to 6 – 16 microinches
- The cross drilling design gives minimum weight and maximum strength.
- Each set contains 2 matched blocks.
- Different tolerances and holes for different applying conditions.
- General packing: Cardboard box.



Description	Dimension Tol	Squareness	Holes
2-3-4 Block	0 ~ 0.0003"	0.0003"/1"	18 untapped holes; 5 tapped holes are 3/8-16; 23 holes on 3 sides, 46 holes on all 6 sides.
2-3-4 Block	0 ~ 0.0003"	0.0001"/1"	18 untapped holes; 5 tapped holes are 3/8-16; 23 holes on 3 sides, 46 holes on all 6 sides.
2-4-6 Block	0 ~ 0.0003"	0.0003"/1"	18 untapped holes; 5 tapped holes are 5/8-11; 23 holes on 3 sides, 46 holes on all 6 sides.
2-4-6 Block	0 ~ 0.0003"	0.0001"/1"	18 untapped holes; 5 tapped holes are 5/8-11; 23 holes on 3 sides, 46 holes on all 6 sides.
2-4-6 & 1-2-3	0 ~ 0.0003"	0.0003"/1"	2-4-6 & 1-2-3 Sets (Squareness: 0.0003"/1")
2-4-6 & 2-3-4	0 ~ 0.0003"	0.0003"/1"	2-4-6 & 2-3-4 Sets (Squareness: 0.0003"/1")
2-4-6 & 1-2-3	0 ~ 0.0003"	0.0001"/1"	2-4-6 & 1-2-3 Sets (Squareness: 0.0001"/1")
2-4-6 & 2-3-4	0 ~ 0.0003"	0.0001"/1"	2-4-6 & 2-3-4 Sets (Squareness: 0.0001"/1")